



Multifunctional Timer Relay



MCB-20-2C

12-240V AC/DC
Supply Range

2C/O, 8A 2000A
Contact Output

IP20 Protection Class

Adjustable time range
from 0.1 second
to 100 hours

7 Different
Time Functions


DIN Rail Mounting




SPECIFICATIONS

MCB-20-2C	
TIME	
Time Range	0,1 sec-100 hours
Number of Time Functions	7
ENCLOSURE	
Dimensions (mm)	Tip PK 22
Protection Class	IP20
SUPPLY	
Operating Voltage	12-240 VAC/DC
Operating Frequency	50/60 Hz
OUTPUT	
Contact Output	2 CO, 8 A, 2000 VA ($\cos\varphi=1$)
CONNECTIONS	
Mounting	DIN Ray Montaj
OPERATING ENVIRONMENT	
Operating Temperature	-5 °C / + 50 °C

Dimensions (mm)(Type PK 25)

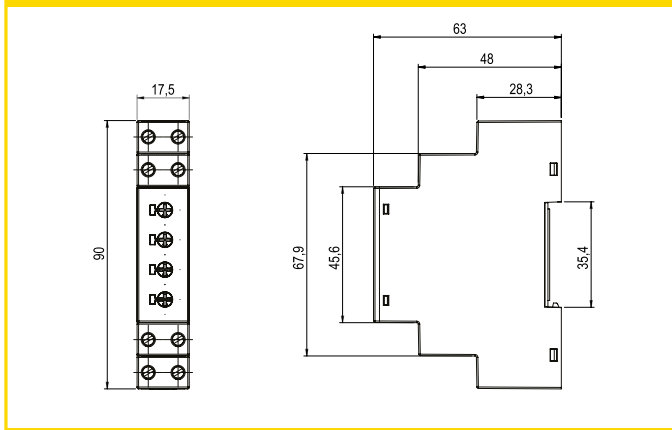

Connection Diagram

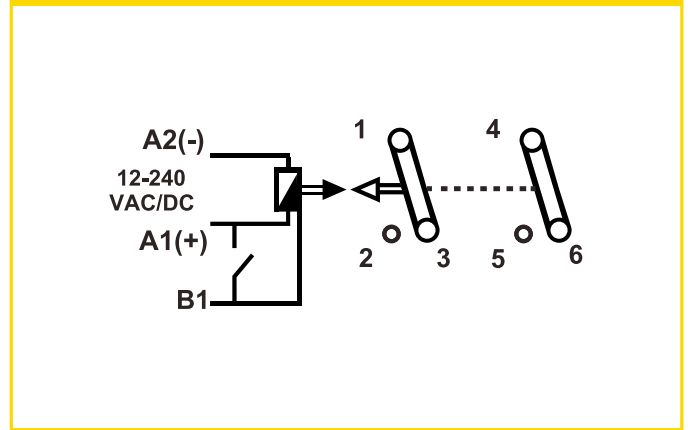

TIME DIAGRAMS

A Function




B Function



C Function



D Function



E Function



F Function



G Function



HEADQUARTERS

Address: Dudullu OSB; 1. Cadde; No: 23 34776 Umraniye - ISTANBUL / TURKIYE Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 Sales Fax: +90 216 365 71 71
E-mail: contact@entes.eu Web: www.entes.eu Call Center Technical Support: 0850 888 84 25 Coordinates: 40,995852 N, 29,178398 E

INTERNATIONAL BRANCH OFFICES

ISTANBUL : contact@entes.eu Tel: +90 216 313 01 10 Fax: +90 216 314 16 15
INDIA : contact@entes.in Tel: +91 981 - 2980004
GREECE : contact@entes.eu Tel: +30 2310 706999 +30 2310 707296
GERMANY : kontakt@enteselektronik.com Tel: +49(0) 7022-931992-0

© ENTES Elektronik Cihazlar İmalat ve Ticaret A.Ş.

